


TYRE REPAIR CATALOGUE REPAIR MATERIALS & ACCESSORIES

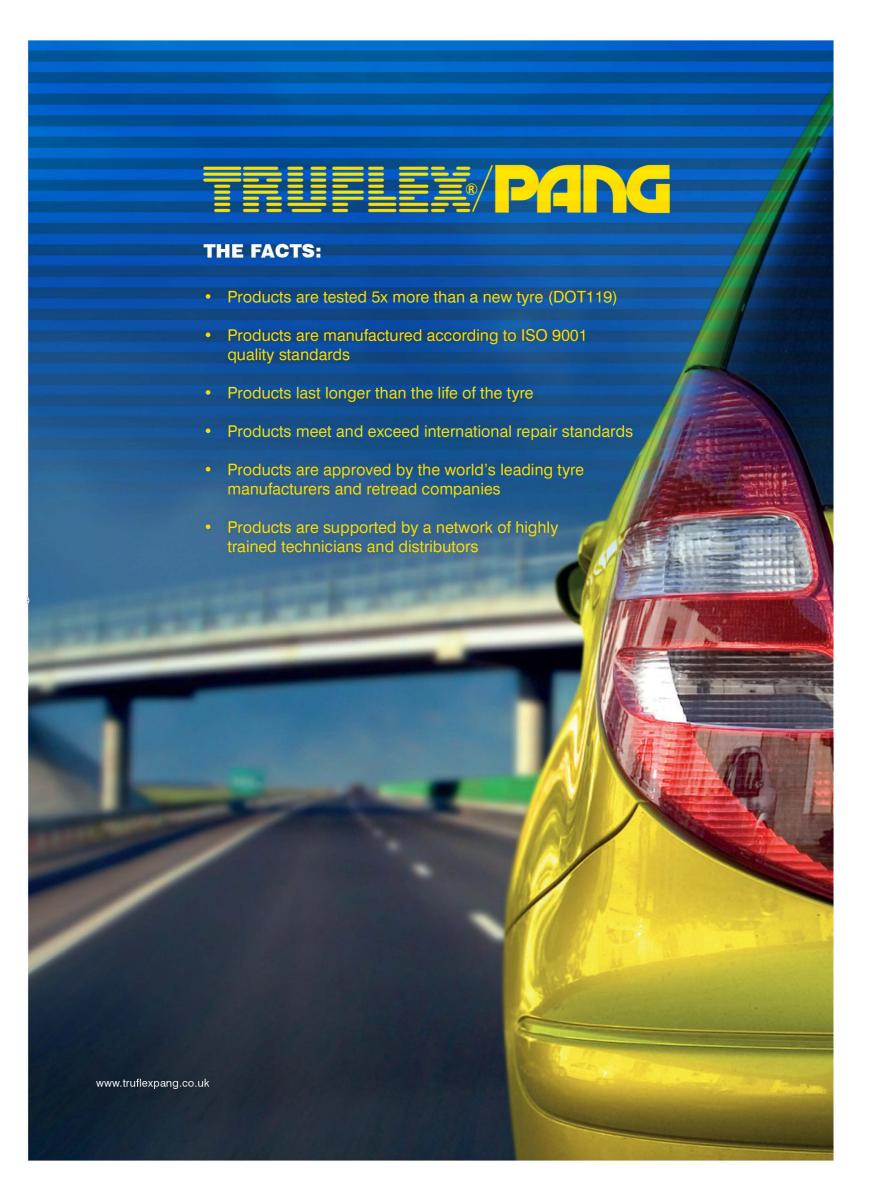

Maxi-Spal

CONTENTS

MAXI-SEAL	4 - 5
RADIAL	6 - 7
BIAS	8 - 9
CHEMICALS	10 - 11
TUBE	12
UNIVERSAL	13
INSERTS	14
TOOLS	15
TPMS	16 - 19



MAXI-SEAL - QUICK, SAFE, PERMANENT REPAIRS

- Lead wire pull through patch/plug combination repairs
- New design innovations combined with new rubber compounding and
- Stronger and more resilient repairs in one simple step
- Maximum adhesion self-vulcanising stem + black Versacure cushion gum
- Exceed all tyre manufacturers' standards for repairing and meet all global industry standards
- Suitable for radial & bias tyres

Code	Description	Box Qty	Case Qty
ॐ ♠			
МЗЕ	Maxi-Seal 3mm prepared injury	60	36
M4.5E	Maxi-Seal 4.5mm prepared injury	24	36
M6E	Maxi-Seal 6mm prepared injury	24	36
M8E	Maxi-Seal 8mm prepared injury	24	36
M ₁₀ E	Maxi-Seal 10mm prepared injury	10	13





MAXI-SEAL XP

- 1st unique multi-layer cross-weave reinforcement for radial and bias tyres
- 1st major section repair solution with a lead wire
- 1st reinforced combination repair manufactured as a single integrated unit
- 1st in performance and speed of installation (save time and money)
- 1st to offer a full international industry standard repair solution in a single unit
- 1st to perform 5x longer than a new tyre

Code	Description	Box Qty	Case Qty
	6 ⊸		
M10XP	Maxi-Seal XP 10mm prepared injury	10	6
M13XP	Maxi-Seal XP 13mm prepared injury	10	6

	ØС	Ø3mm	Ø4.5mm	Ø6mm	Ø8mm	Ø10mm
	Speed Index	МЗ	M4.5	M6	М8	M10
)	>H	•	•	•	х	х
6	V	•	•	•	Х	х
	ZR-W	•	х	Х	Х	х
0 000		٠	•	٠	*	•
		•		٠	•	


	•	•:	٠	٠	•		
Carbide	CC3	CC4.5	CC6	CC8	CC10		CC10
						ı,	

Ø13mm	NO/NON
M13 XP	REPAIR
	Overlap
х	
Х	
•	Same Radial Ply
	(X)
	M13 XP

CC13







Angles > 25° require a 2 piece repair system to be used



- All injuries should be filled with an appropriate insert or filler
 Local industry repair standards should be observed at all times
 - All tyres MUST be demounted and inspected before repairing
 Repair charts and manuals available on request and via www.truflexpang.co.uk



MAXISTEMS

- Rubber insert with lead wire
- Easy-to-use injury filler
- To be used with corresponding Truflex/Pang patch for a permanent two-piece repair

Code	Description	Box Qty	Case Qty
🗝 🗪			
M6PS	Maxistem 6mm prepared injury	20	20
M8PS	Maxistem 8mm prepared injury	20	20
M10PS	Maxistem 10mm prepared injury	20	20



Truck stems available on request

TRUFLEX/PANG RUNFLAT KIT

- Repair Runflat tyres using Truflex/Pang tyre repair technology
- Stronger and more resilient repairs in one simple step
- Exceed all tyre manufacturers' standards for repairing and meet all global industry standards
- Environmentally responsible

Code	Description	Case (
	— — 5th	Oase C
RFK	Maxi-Seal 3mm x 20,	4
	Maxi-Seal 4.5mm x 12	
	Maxi-Seal 6mm x 12	
	1 x 816F/11oz Bufsol spray	
	1 x BLRSF/PT Butyl Liner Repair Sealer	
	1 x 608F/8oz Supersolution	
	1 x TRT105 Injury Measuring Tool	
	1 x 915 Spiral Cement Tool	
	1 x 936 Stitcher	
	1 x 933 Rubber Scrapper	
	1 x CC3, CC4.5 & CC6 Carbide	
	1 x Knife	
	1 x Runflat repair limitations chart and instructions	
	1 x PG159 Tyre Tread Measuring Gauge	
	1 x RFK Contents	
	Features & Benefits Flyer	



PANGSEALS (FOR BIAS TYRES)

- Patch/plug combination repairs for bias truck tyres
- Reinforced patch stronger and more resilient repairs
- Maximum adhesion chemical vulcanisation using Maxibond cement

Code	Description	Box Qty	Case Qty
PS4L	Pangseal 15mm prepared injury	6	10
PS5L	Pangseal 20mm prepared injury	6	10
PS6L	Pangseal 25mm prepared injury	6	10



Pangseal cutters available on request







- NOTE:

 All injuries should be filled with an appropriate insert or filler

 Local industry repair standards should be observed at all times
- All tyres MUST be demounted and inspected before repairing
 Repair charts and manuals available on request and via www.truflexpang.co.uk



MCX RADIAL REPAIRS

- To repair injuries in the crown, shoulder or sidewall of radial tyres
- Superior performance 5x longer than a new tyre
- Suitable for hot and cold application
- Extended shelf life
- Meet all global industry standards
- Refer to Truflex/Pang MCX Radial Repair Chart, available via www.truflexpang.co.uk, for instruction
- MCX Radial Repair Manual also available for download via www.truflexpang.co.uk

Code	Description	Box Qty	Case Qty
~			
MCX10	65x80mm Chemical Radial Repair	20	30
MCX12	70x115mm Chemical Radial Repair	10	77
MCX14	75x145mm Chemical Radial Repair	10	48
MCX15	80x80mm Chemical Radial Repair	20	16
MCX20	75x125mm Chemical Radial Repair	10	40
MCX22	75x165mm Chemical Radial Repair	10	30
MCX24	75x215mm Chemical Radial Repair	10	12
MCX25	100x125mm Chemical Radial Repair	10	30
MCX26	75x250mm Chemical Radial Repair	10	18
MCX28	75x330mm Chemical Radial Repair	10	
MCX35	125x150mm Chemical Radial Repair	10	16
MCX37	125x170mm Chemical Radial Repair	5	
MCX40	100x200mm Chemical Radial Repair	10	16
MCX42	125x250mm Chemical Radial Repair	5	18
MCX44	125x330mm Chemical Radial Repair	5	12
MCX45	195x230mm Chemical Radial Repair	5	
MCX46	140x405mm Chemical Radial Repair	5	



Code	Description	Box Qty	Case Qty
5⊷			
MCX20	75x125mm Chemical Radial Repair	10	40
MCX22	75x165mm Chemical Radial Repair	10	30
MCX80	150x195mm Chemical Radial Repair	5	
MCX82	190x250mm Chemical Radial Repair	5	
MCX84	215x290mm Chemical Radial Repair	5	
MCX86	245x340mm Chemical Radial Repair	5	



Radial Repairs also available as MFX Fabricure (cured on fabric backing) on request

Code	Description	Box Qty	Case Qty
6°0×			
MCX44	125x330mm Chemical Radial Repair	5	12
MCX45	195x230mm Chemical Radial Repair	5	
MCX46	140x405mm Chemical Radial Repair	5	
MCX50	190x500mm Chemical Radial Repair	3	
MCX52	250x570mm Chemical Radial Repair	3	
MCX55	260x330mm Chemical Radial Repair	3	
MCX56	265x655mm Chemical Radial Repair	3	
MCX60	265x860mm Chemical Radial Repair	3	
MCX65	330x420mm Chemical Radial Repair	3	
MCX68	315x730mm Chemical Radial Repair	3	
MCX75	450x535mm Chemical Radial Repair	1	



OTR Radial Repairs also available as MHX Heatcure (applied with heat in section molds or autoclaves) on request





- NOTE:

 All injuries should be filled with an appropriate insert or filler

 Local industry repair standards should be observed at all times
- All tyres MUST be demounted and inspected before repairing
 Repair charts and manuals available on request and via www.truflexpang.co.uk

THUFLEX/PANG

MSX RADIAL REPAIRS

- MSX Versacure Radial Repairs set the standard for tyre repair technology
- Constructed using unique technology to exceed the demands of tyre manufacturers and retreaders
- Superior hot repair application performance (use with RS3F Rapid Solution)
- May also be used in cold application (use with 658F Maxibond Cement)
- Tested more than 5 times that of a new tyre for performance
- Designed to last multiple retread cycles
- Greatly extended shelf-life
- Refer to Truflex/Pang MSX Radial Repair Chart, available via www.truflexpang.co.uk, for instruction
- MSX Radial Repair Manual also available for download via www.truflexpang.co.uk

Code	Description	Box Qty	Case Qty
~			
MSX10	45x75mm Versacure Radial Repair	20	48
MSX10HD	65x80mm Versacure Radial Repair	10	36
MSX12	70x115mm Versacure Radial Repair	10	48
MSX12HD	70x115mm Versacure Radial Repair	10	42
MSX14	75x145mm Versacure Radial Repair	10	42
MSX20	75x125mm Versacure Radial Repair	10	40
MSX22	75x165mm Versacure Radial Repair	10	21
MSX24	75x215mm Versacure Radial Repair	10	20
MSX25	100x125mm Versacure Radial Repair	10	18
MSX26	75x250mm Versacure Radial Repair	10	18
MSX35	125x150mm Versacure Radial Repair	10	18
MSX37	125x170mm Versacure Radial Repair	5	10
MSX40	100x200mm Versacure Radial Repair	10	12
MSX42	125x250mm Versacure Radial Repair	5	12
MSX44	125x330mm Versacure Radial Repair	5	12
MSX45	195x230mm Versacure Radial Repair	5	
MSX46	140x405mm Versacure Radial Repair	5	
5 ≒			
MSX20	75x125mm Versacure Radial Repair	10	40
MSX22	75x165mm Versacure Radial Repair	10	30
MSX80	150x195mm Versacure Radial Repair	5	
MSX82	190x250mm Versacure Radial Repair	5	
MSX84	215x290mm Versacure Radial Repair	5	
MSX86	245x340mm Versacure Radial Repair	5	











MHX Heatcure, MFX Fabricure, and Aramid-Reinforced Versacure available on request



- NOTE:

 All injuries should be filled with an appropriate insert or filler

 Local industry repair standards should be observed at all times
- All tyres MUST be demounted and inspected before repairing
 Repair charts and manuals available on request and via www.truflexpang.co.uk



PHD BIAS REPAIRS

- Excellent flexibility, greater strength and superior construction
- For use on tubeless or tube-type tyres
- Easy application, hot or cold
- Designed for excellent air retention
- Exceed the life of the tyre
- Refer to Truflex/Pang PHD Repair Chart, available via www.truflexpang.co.uk, for instruction

Code	Description	Plies	Box Qty	Case Qty
←	₹			
PHD1	65mm Chemical Bias Ply Repair	2	20	50
PHD2	90mm Chemical Bias Ply Repair	2	10	72
PHD3	100mm Chemical Bias Ply Repair	2	10	30
PHD4	130mm Chemical Bias Ply Repair	4	10	8
PHD5	165mm Chemical Bias Ply Repair	4	10	8
PHD6	240mm Chemical Bias Ply Repair	6	5	5
PHD7	290mm Chemical Bias Ply Repair	6	5	
PHD8	340mm Chemical Bias Ply Repair	6	5	
PHD9	380mm Chemical Bias Ply Repair	8	3	
PHD10	430mm Chemical Bias Ply Repair	8	3	





SPHD BIAS REPAIRS

- Superior hot repair application performance (use with RS3F Rapid Solution)
- May also be used in cold application (use with 658F Maxibond Cement)
- Refer to Truflex/Pang PHD Repair Chart, available via www.truflexpang.co.uk, for instruction

Code	Description	Plies	Box Qty	Case Qty
←	160x			
SPHD1	65mm Versacure Bias Ply Repair	2	20	48
SPHD2	90mm Versacure Bias Ply Repair	2	10	48
SPHD3	100mm Versacure Bias Ply Repair	2	10	48
SPHD4	130mm Versacure Bias Ply Repair	4	10	24
SPHD5	165mm Versacure Bias Ply Repair	4	10	18
SPHD6	240mm Versacure Bias Ply Repair	6	5	6
SPHD7	290mm Versacure Bias Ply Repair	6	5	
SPHD8	340mm Versacure Bias Ply Repair	6	5	
SPHD9	380mm Versacure Bias Ply Repair	8	3	
SPHD10	430mm Versacure Bias Ply Repair	8	3	







- NOTE:

 All injuries should be filled with an appropriate insert or filler

 Local industry repair standards should be observed at all times

- All tyres MUST be demounted and inspected before repairing
 Repair charts and manuals available on request and via www.truflexpang.co.uk

THUFLEX/PANG

SPHDT BIAS (TRACTOR) REPAIRS

- Unsurpassed performance in tractor tyre repair
- Exceeds all demands of a tractor tyre in service
- Superior hot repair application performance (use with RS3F Rapid Solution)
- Refer to Truflex/Pang PHD Repair Chart, available via www.truflexpang.co.uk, for instruction

Code	Description	Plies	Box Qty
5			
SPHDT0	200mm Versacure Bias Ply Repair (Tractor)	4	10
SPHDT1	225mm Versacure Bias Ply Repair (Tractor)	4	5
SPHDT2	275mm Versacure Bias Ply Repair (Tractor)	4	5
SPHDT3	375mm Versacure Bias Ply Repair (Tractor)	4	5
SPHDT4	225mm Versacure Bias Ply Repair (Tractor)	6	5
SPHDT5	275mm Verscaure Bias Ply Repair (Tractor)	6	5
SPHDT6	375mm Versacure Bias Ply Repair (Tractor)	6	5
SPHDT7	490mm Versacure Bias Ply Repair (Tractor)	6	3





OTR BIAS REPAIRS

- Proven in construction and mining operations throughout the world
- Restore damaged bias OTR tyres to their original strength
- Superior adhesion with all vulcanising systems
- Refer to Truflex/Pang OTR Repair Chart, available via www.truflexpang.co.uk, for instruction

Description	Plies	Box Qty
180mm Chemical Bias Ply Repair (OTR)	4	12
240mm Chemical Bias Ply Repair (OTR)	8	12
280mm Chemical Bias Ply Repair (OTR)	8	12
290mm Chemical Bias Ply Repair (OTR)	12	12
355mm Chemical Bias Ply Repair (OTR)	12	6
405mm Chemical Bias Ply Repair (OTR)	12	6
455mm Chemical Bias Ply Repair (OTR)	14	3
490mm Chemical Bias Ply Repair (OTR)	16	3
520mm Chemical Bias Ply Repair (OTR)	20	3
570mm Chemical Bias Ply Repair (OTR)	20	3
	180mm Chemical Bias Ply Repair (OTR) 240mm Chemical Bias Ply Repair (OTR) 280mm Chemical Bias Ply Repair (OTR) 290mm Chemical Bias Ply Repair (OTR) 355mm Chemical Bias Ply Repair (OTR) 405mm Chemical Bias Ply Repair (OTR) 455mm Chemical Bias Ply Repair (OTR) 490mm Chemical Bias Ply Repair (OTR) 520mm Chemical Bias Ply Repair (OTR)	180mm Chemical Bias Ply Repair (OTR) 4 240mm Chemical Bias Ply Repair (OTR) 8 280mm Chemical Bias Ply Repair (OTR) 8 290mm Chemical Bias Ply Repair (OTR) 12 355mm Chemical Bias Ply Repair (OTR) 12 405mm Chemical Bias Ply Repair (OTR) 12 455mm Chemical Bias Ply Repair (OTR) 14 490mm Chemical Bias Ply Repair (OTR) 16 520mm Chemical Bias Ply Repair (OTR) 20







OTR Bias Ply repairs are also available in heatcure (HOTR), uncured (UOTR) and fabricure (FOTR) on request



- NOTE:

 All injuries should be filled with an appropriate insert or filler

 Local industry repair standards should be observed at all times
- All tyres MUST be demounted and inspected before repairing
 Repair charts and manuals available on request and via www.truflexpang.co.uk





SUPERSOLUTION

- High performance, fast-drying vulcanising fluid for general application when repairing tubes and tyres
- Can be used in hot or cold applications

Code	Description	Case Qty
608F/8oz	235ml Supersolution	24
608F/QT	945ml Supersolution	10
T5FL	7ml tube Supersolution	50
T10FL	14ml tube Supersolution	50
T25FL	35ml tube Supersolution	50
T50FL	70ml tube Supersolution	25



HEAVY-DUTY SOLUTION

- Thick, non-flammable chemical cement designed for use in tube-type bias-ply tyres
- For use in all applications requiring higher tack

Code	Description	Case Qty
708F/8oz	235ml Heavy-Duty Solution	24
708F/QT	945ml Heavy-Duty Solution	10
708F/GAL	3.8l Heavy-Duty Solution	4

BUFSOL

Pre-buff chemical cleaner removes mould and contamination found on tyre inner liner surfaces and tubes, prior to mechanical buffing



Code	Description	Case Qty
816F/11oz	470ml Bufsol Pre-buff Cleaner	12
816F/QT	945ml Bufsol Pre-buff Cleaner	12
816F/GAL	3.8l Bufsol Pre-buff Cleaner	4

MAXIBOND

- Premium heavy-duty blue cement that meets requirements for high tack and superior adhesion of repairs in demanding environments
- Can be used in hot or cold applications
- For use with all Truflex/ Pang repairs



Code	Description	Case Qty
658F/8oz	235ml Maxibond	24
658F/QT	945ml Maxibond	10

RAPID SOLUTION

- High tack black vulcanising cement for use in hot application
- Use to apply uncured repairs and cushion gum in tyre repairing
- For use with Truflex/ Pang's Versacure repairs in almost all retread curing systems



Code	Description	Case Qty
RS3F/QT	945ml Rapid Solution	10
RS3F/GAL	3.8l Rapid Solution	4



- NOTE:
 All injuries should be filled with an appropriate insert or filler
 Local industry repair standards should be observed at all times
 - All tyres MUST be demounted and inspected before repairing
 Repair charts and manuals available on request and via www.truflexpang.co.uk

BEAD SEALER

Brushable solution that seals any leaks between the tyre bead and rim

TRUFLEX/PANG

Apply before mounting



Code	Description	Case Qty
B77F/QT	945ml Bead Sealer	10

BUTYL LINER REPAIR SEALER

Restores and secures the air retention properties of the tyre inner-liner after repair



Code	Description	Case Qty
BLRSF/PT	470ml Butyl Liner Repair Sealer	12
BLRSF/QT	945ml Butyl Liner Repair Sealer	10



MOUNTING COMPOUND

Mounting/Demounting paste

Code	Description
722P	5kg Mounting Compound



PANGIT A&B COMPOUND

- A two-part self-vulcanising product, curing at room temperature
- Both parts are mixed and utilised to fill and repair all types of tyre and rubber damage
- For use with blue Maxibond cement

Code	Description
110FP-SET	0.9kg Pangit A&B Compound
120FP-SET	1.8kg Pangit A&B Compound





Complete range of adhesives, chemicals, specialist rubber compounds and tools for Industrial application.

Visit www.truflexpang.co.uk for full details



- NOTE:

 All injuries should be filled with an appropriate insert or filler

 Local industry repair standards should be observed at all times
- All tyres MUST be demounted and inspected before repairing Repair charts and manuals available on request and via www.truflexpang.co.uk




HIGH QUALITY TUBE REPAIRS

- · Permanent and safe
- Stronger than the tube
- Suitable for any on or off road tube injury
- Unit-moulded repair with foil backing
- Easy application
- Built for maximum adhesion
- · Superb shelf-life



Code	Description	Box Qty	Case Qty
ಕರಿ ೯	🗪 🚐 🎮		
B0	20mm Round	150	18
B1	25mm Round	150	18
B2	25 x 60mm Oval	100	18









Tube replacement valves available on request

Code	Description	Box Qty	Case Qty			
රීට 📂 🚗 💴 🏞						
PP0	30mm Round	150	18			
PP1	35mm Round	100	18			
PP2	45mm Round	60	18			
PP3	55mm Round	44	18			
PP4	75mm Round	32	18			
PP5	95mm Round	25	18			
PP6	116mm Round	10	18			
PP7	75 x 35mm Oval	45	18			
PP8	100 x 45mm Oval	35	18			
PP9	160 x 75mm Oval	10	1			
PP10	190 x 95mm Oval	10	1			

TUBE REPAIR KITS



Code	Description	Contents	Box Qty
ठैठे छ	ðo 🚗 💴 🎘		
PF10	Mountain Bike	4 repair units: 80×2 , 82×1 , $PP1 \times 1$, $1 \times 7ml$ tube Supersolution, 1×1 a brasive strip, 1×1 rubber valve tube, 1×1 instructions	10
PF11	Touring Bike	8 repair units: B0 x 2, B1 x 2, B2 x 2, PP0 x 2, 1 x 7ml tube Supersolution, 1 x abrasive strip, 1 x rubber valve, 2 x plastic lever, 1 x instructions	10
PF12	Bike	5 repair units: B1 x 4, B2 x 1, 1 x 7ml tube Supersolution, 1 x abrasive strip, 1 x rubber valve, 1 x instructions	10
PF13	Bike	7 repair units: 80×3 , 81×3 , 82×1 , 1×7 ml tube Supersolution, 1×1 a brasive strip, 1×1 rubber valve, 1×1 instructions	10
PF25	Motor Bike	5 repair units: PP0 x 1, PP1 x 1, PP2 x 2, PP7 x 1, 1 x 7ml tube Supersolution, 1 x metal buffer, 1 x instructions	10
PF29	Car/Truck	10 repair units: PP0 x 2, PP1 x 2, PP2 x 2, PP3 x 1, PP4 x 1, PP7 x 1, PP8 x 1, 1 x 14ml tube Supersolution, 1 x metal buffer, 1 x instructions	10
CA02	PVC Repair	Plastic repair material roll, 2 x adhesive, 1 x abrasive strip, 1 x instructions	10





- NOTE:

 All injuries should be filled with an appropriate insert or filler

 Local industry repair standards should be observed at all times
- All tyres MUST be demounted and inspected before repairing
 Repair charts and manuals available on request and via www.truflexpang.co.uk

ALL PURPOSE REPAIRS

- · Permanent and safe
- Chemical cure
- · Unit-moulded repair with foil backing
- · Non-reinforced
- Suitable for radial & bias tyres
- For injuries up to 8mm

Code	Description	Box Qty	Case Qty	
♣ €				
TP3	38mm Square	50	18	
TP4.5	45mm Square	50	18	
TP6	60mm Square	50	32	
TP8	70mm Square	50	14	







HEAVY-DUTY UNIVERSAL REPAIRS

- · Permanent and safe
- · Chemical cure
- · Unit-moulded repair with foil backing
- Non-reinforced
- Suitable for radial & bias tyres
- For injuries up to 10mm



Code	Description	Box Qty	Case Qty
a	- <u> </u>		
RMTo	32mm Round	100	18
RMT11	38mm Round	100	18
RMT12	48mm Round	100	18
RMT1	54mm Round	50	18
RMT2	75mm Round	40	18
SMT1	57mm Square	50	18
SMT2	65mm Square	40	18

40mm Round

60mm Round

80mm Round

75mm Square

Box Qty

24

24

24

30

Case Qty

24

36

24

REINFORCED UNIVERSAL REPAIRS

- · Permanent and safe
- Chemical cure

- · Unit-moulded repair with foil backing
- · Nylon-mesh reinforced for added strength
- · Suitable for radial & bias tyres
- For injuries up to 10mm

USE WITH				
TRUPLES PAR BLUE MATERIAL Comments	PURLEY PAY	BURNOUS PRESULTS OF THE PROPERTY OF THE PROPER	THE EX POT	MUREIC PATIG
Chemicals and	d Tools (See p	pages 10,	11+13)	



C2

СЗ

S3



- NOTE:

 All injuries should be filled with an appropriate insert or filler

 Local industry repair standards should be observed at all times
- All tyres MUST be demounted and inspected before repairing
 Repair charts and manuals available on request and via www.truflexpang.co.uk





PANG-O-FIL (POF) REINFORCED INSERTS

- Keep moisture out and seal injuries to prevent rust
- POFs exclusive nylon reinforcement system wrapped in Versacure gum
- Fast, effective, durable, and permanent repairs
- Suitable for all tubeless tyres in the tread, sidewall and shoulder areas

Code	Description	Box Qty	Case Qty
ॐ €	, , , , , , , , , , , , , , , , , , , 		
POF3	100mm Thin Pang-O-Fil Insert (Passenger)	50	48
POF5	100mm Pang-O-Fil Insert (Truck)	50	48
POF8	200mm Pang-O-Fil Insert (OTR)	25	35

RECOMMENDED TOOL	USE WITH
**	TRUTTER PROT
Insert Tools (See Page 15)	Supersolution (See page 10)

Code	Contents	Case Qty
ब्लैं 🚓		
PRP	Passenger Repair Kit: POF3 Inserts x 50, 1 x 608F/8oz Supersolution, 1 x 925 Insert Tool, 1 x R023 Rasp, 1 x Knife	6
PRT	Truck Repair Kit: POF5 Inserts x 40, 1 x 608F/8oz Supersolution, 1 x 925T Insert Tool, 1 x R023 Rasp, 1 x Knife	6
PATV	Scooter Repair Kit: POF3 Inserts x10, 1 x 5ml tube solution, 1 x TST1 Multi-tool, 2 x 16g CO2 Cylinder, 1 x ATB Valve Adaptor	24





QUIK FIX STRING REPAIRS

- Instant outside-in repair solution for small injuries (up to 6mm)
- Temporary repair for passenger car & truck
 Of particular use for off-road application (tractor & OTR)

Code	Description	Box Qty	Case Qty
	5- 60 / 10-		
239P	100mm Thick Brown String	60	56
240P	100mm Thick Black String	60	56
242PBRN	200mm Thick Brown String	30	56
242P	200mm Thick Black String	30	56
242PTBR	200mm Thin Brown String	50	56
242PT	200mm Thin Black String	50	56

RECOMMENDED TOOL	USE WITH
**	TOPIES POY
Insert Tools (See Page 15)	Supersolution (See page 10)

Code	Contents	Case Qty
	a 5 ≈ 5° ~	
SR4	Passenger Repair Kit: 100mm Strings x 60, 1 x 608F/8oz Supersolution, 1 x 925 Insert Tool, 1 x 915 Spiral Cement Tool, 1 x Knife	6
SR8	Truck Repair Kit: 200mm Strings x 30, 1 x 608F/8oz Supersolution, 1 x 925T Insert Tool, 1 x 915 Spiral Cement Tool, 1 x Knife	6



SR8



- NOTE:

 All injuries should be filled with an appropriate insert or filler

 Local industry repair standards should be observed at all times
- All tyres MUST be demounted and inspected before repairing
 Repair charts and manuals available on request and via www.truflexpang.co.uk

Tools and accessories made of the highest quality materials, designed to make tyre repair easier and faster

STITCHERS & SCRAPERS

Code	Description
933	Rubber scraper
935	Stitcher / Buffer
936	Stitcher 38mm x 3mm
938	Stitcher 38mm x 0.8mm
939	Stitcher 50mm x 5mm



KNIVES & AWLS

Code	Description
940	X2T Taper Skiving Knife
941	X1Y Extra Curve Skiving Knife
942	X3N Round Point Flexible Skiving Knife
918	Duck Bill Awl 100mm
919	Pointed Awl 200mm



CEMENT TOOLS

Code	Description
915	Spiral Cement Tool
916	Giant Spiral Cement Tool
TRT105	Injury Measuring Tool



INSERT TOOLS

* Replacement needles also available

Code	Description
925	Passenger Insert Tool
925T	Truck Insert Tool
925E	Earthmover Insert Tool
905	Heavy-Duty Insert Tool



CARBIDE CUTTERS

Code	Description
CC3	3mm Carbide
CC4.5	4.5mm Carbide
CC6	6mm Carbide
CC8	8mm Carbide
CC10	10mm Carbide
CC13	13mm Carbide



Visit www.truflexpang.co.uk for details of additional tools and wheel service solutions, including:

BALANCING COMPOUND BUFFING MEDIUMS SEALING RINGS TYRE REGROOVING **TUBELESS VALVES & VALVE HARDWARE** WHEEL BALANCE WEIGHTS



- NOTE:

 All injuries should be filled with an appropriate insert or filler

 Local industry repair standards should be observed at all times
- All tyres MUST be demounted and inspected before repairing
 Repair charts and manuals available on request and via www.truflexpang.co.uk



Tech Europe

15 Ballinderry Road, Lisburn, BT28 2SA, N. Ireland, UK t: +44 (0)2892 665721 f: +44 (0)2892 601611 e: info@techeurope.co.uk

Truflex/Pang European Technical Training Centre Bremheidalaan 6 2300 Turnhout

2300 Turnhout Belgium t: +32 (0)14 423103 f: +32 (0)14 417003